LAND GROUP
FOR NEXT MIRACLE

ZHEJIANG POWERTEK TECHNOLOGY CO.,LTD
ZHEJIANG NEWLAND INDUSTRIAL HOLDING CO.,LTD

MEASURING TOOLS
CATALOG

LAND GROUP
FOR NEXT MIRACLE

ZHEJIANG POWERTEK TECHNOLOGY CO.,LTD
ZHEJIANG NEWLAND INDUSTRIAL HOLDING CO.,LTD
Tel：86-574-62766858 62766868 Fax：86-574-62766677 62766699
E-mail: Lda@Landgp.cn Http://www.china-land.com

SCAN FOR
MORE INFORMATION

BSCI
Business Social Compliance Initiative

LAND GROUP
FOR NEXT MIRACLE

COMPANY PROFILE

- **Establishment:**
LAND was established in 1991 and now has been considered as one of the toppest companies in industries of Hardware tools 、 Measuring tools and High Pressure Washers.

- **Scales of Company:**
LAND has a garden-like factory covers 180000 square meters with 90000 square meters workshop area, annual sales reached 500m RMB in 2013.

- **Strong Brand Advantage:**
LAND is Registered brand in over 70 countries; Chinese Famous Export Brand ; China Renowned Trademark ; Chinese top 10 well-known tools enterprises; Chinese famous-brand of tools. LAND is the constitutor of national industry standard of steel measuring tape \ level \ fiberglass.

- **Main Products & Advantage Superior Quality:**
We are a professional manufacturer specialized in measuring tapes, levels, pliers, laser products , digital display products , high pressure washers; The products own many international certificates such as UL、MID、GS/CE、EEC、FDA、FCC、SAA、ETL,ROHS, CCC etc, approvals to facilitate entry into 100 countries; Obtained more than 200 international patents.

- **Strong Develop Strength:**
Professional engineer team with strong ability responsible for quality, technology and design, will develop according to the drawing or sample from clients, providing with competitive products to global market.

- **Great Developing Potential:**
As the chief of Hardware tools vocation in China, We are persisting into the slogan 'renewing for everlasting, credit to succeed'. With strong and creative engineering team, professional marketing team, experienced managing team, with the continuously upgraded general strength, this group is developing quickly.

- **Service Purpose:**
To satisfy customers is our everlasting pursuit. We try to be the best supplier in your heart.

ISO 9001 14001 CE MID

QUALITY MANAGEMENT SYSTEM
CERTIFICATE

CERTIFICATION SERVICES

ENVIRONMENTAL MANAGEMENT
SYSTEM CERTIFICATE

CONTENTS

01 Company Profile

03 Steel Tape

21 Long Steel Tape

27 Fibreglass Measuring Tape

34 Distance Measuring Wheel

36 Level

47 Laser Products

55 Other measuring tools & Prefix template for MID & CE

LAND GROUP
— FOR NEXT MIRACLE —

ProMeasure
STEEL TAPE

Land Brand steel measuring tape applies the new technolgy of ultraviolet to make the printing plate and infrared to stabilize the coating. This product features a clear surface, bright colour blades, logical structure, novel styles, good flexibility and straightness of the blade in operation, boasting its extensive range of series, multifunctions, intelligence and practicability etc.. They are sold all over China and exported to the global market. They are well received by our customers. Our supply includes the steel measuring tapes of auto-rolling type in 1-10m of only metric system, 3-33ft of only british graduation, 1m/3ft-10m/33ft of british metric dual graduation, and manual-rolling type in 10-50m of only metric system.

Quality Standard: Standard of P.R.China GB10633-89 Reference Standard:No.350IML International Suggestion.

Tolerance of the value indication from the zero point to any graduation line must accord with the following rule:

Class Ⅰ := △ ±(0.1+0.1 · L)mm Class Ⅱ := △ ±(0.3+0.2 · L)mm

Note: △ refers to the tolerance of the value indication. L refers to the length in metre the most approximate and bigger round-numbered value in metre is adopted in case the length is not a round-numbered multiple of one metre.

The absolute value of the tolerance may increase for blades of extremity and combination types in the absolute value of the tolerance. Class Ⅰ :=0.1 mm Class Ⅱ :=0.2mm

Reference Symbol:

LD - (J) F 2 13 T

- T — Code of tape width
- 13 — Series Number
- 2 — Length
- F — Code of function
- (J) — Long tape in frame
- LD — Code of company

Reference Mark for Tape Width:

6mm	S
10mm	T
12.5mm	
16mm	W
19mm	E
25mm	X
32mm	G

BLADE GRADUATION

011		Metric Graduation
012		Metric Graduation
013		Metric Graduation
014		Consecutive Metric Graduation
015		Consecutive Metric Graduation
016		Consecutive Metric Graduation
021		British-Metric Graduation
022		British-Metric Graduation
023		British-Metric Graduation
031		Fortune Teller's Tape
041		British Graduation
042		British Graduation
043		British Graduation
044		British Graduation
045		British Graduation
046		Metric Graduation

* Available for Double side printed steel tape measure .
* Blade Graduation subject to the final products

ProMeasure
STEEL TAPE

Main Features:

- High-grade steel scale tape,straightness stronger;
- High quality blade with clear graduation;
- Ergonomically and popular design;
- Resistance to drop & prevent slippery Rubber;
- Excellent locking system holds blade firmly.

Model			(mm) QTY.LBS.CU FT	PCS	KG
3N50W	3m/10ft	16mm	–	–	–
5N50E	5m/16ft	19mm	–	–	–
5N50X	5m/16ft	25mm	–	–	–
7HN50X	7.5m/25ft	25mm	–	–	–
10N50X	10m/33ft	25mm	–	–	–

Main Features:

- High-grade steel scale tape,straightness stronger;
- High quality blade with clear graduation;
- Ergonomically and popular design;
- Co-molded rubber case,shockproof and comfortable grip;
- Excellent locking system holds blade firmly.

Packing Date:

Patent:ZL 2014 30075735.1

Model			(mm) QTY.LBS.CU FT	PCS	KG
3N39W	3m/10ft	16mm	680×420×255	120	19/17
5N39E	5m/16ft	19mm	810×420×255	120	23/21
5N39X	5m/16ft	25mm	520×335×395	72	18/16
7HN39X	7.5m/25ft	25mm	780×260×305	50	21/19
10N39X	10m/33ft	25mm	530×330×210	60	30/28

ProMeasure
STEEL TAPE

NEW

Series N35

Main Features:

- High-grade steel scale tape,STRAIGHTNESS stronger
- ABS case with high quality
- Ergonomically and popular design
- Excellent locking system holds blade firmly
- High quality blade with clear graduation
- Shock absobring device at the blade retraction

Model			(mm) QTY.LBS.CU FT	PCS	KG
3N35	3m/10ft	12.5mm	480×370×300	200	17/15
3N35W	3m/10ft	16mm	480×370×300	200	17/15
5N35E	5m/16ft	19mm	490×340×320	120	23/21
5N35X	5m/16ft	25mm			
7HN35X	7.5m/25ft	25mm	580×350×210	60	20/18

NEW

Series N32

Main Features:

- High quality blade with clear graduation
- Co-molded rubber case,shockproof and comfortable grip
- Excellent locking system holds blade firmly

Model			(mm) QTY.LBS.CU FT	PCS	KG
3N32	3m/10ft	12.5mm	405×335×245	120	17/15
3N32W	3m/10ft	16mm	405×335×245	120	17/15
5N32E	5m/16ft	19mm	455×280×200	120	21/19
7HN32X	7.5m/25ft	25mm	455×280×250	60	22/20
10N32X	10m/25ft	25mm		60	

NEW

Series N31

Main Features:

- Selflock system
- Comfortable grip

Selflock

Model			(mm) QTY.LBS.CU FT	PCS	KG
3N31W	3m/10ft	16mm	630×320×240	120	21/19
5N31E	5m/16ft	19mm	665×360×300	120	23/21
7HN31X	7.5m/25ft	25mm	730×350×205	60	22/20

HOT

Series N30

Main Features

- Blade with accuracy class I,precise and clear graduation;
- POM button which holds blade firmly;

Violet (UV Spray painting) | Orange (UV Spray painting) | Porcelaine White (ABS Case) | Sliver (Chrome-Coated Case) | Black (ABS Case)

Model			(mm) QTY.LBS.CU FT	PCS	KG
3N30W	3m/10ft	16mm	810×420×255	120	15/13
5N30E	5m/16ft	19mm	680×420×255	100	22/20
5N30X	5m/16ft	25mm	520×335×425	72	18/16
7HN30X	7.5m/25ft	25mm	780×260×305	50	21/19

HOT

Series N30-1

Main Features:

- Blade with accuracy class I,precise and clear graduation;
- POM button which holds blade firmly;

Violet (UV Spray painting) | Orange (UV Spray painting) | Porcelaine White (ABS Case) | Sliver (Chrome-Coated Case) | Black (ABS Case)

Model			(mm) QTY.LBS.CU FT	PCS	KG
3N30-1W	3m/10ft	16mm	810×420×255	120	15/13
5N30-1E	5m/16ft	19mm	680×420×255	100	22/20
5N30-1X	5m/16ft	25mm	520×335×425	72	19/17
7HN30-1X	7.5m/25ft	25mm	780×260×305	50	21/19

Series N27

Main Features:

- High quality rubber case,Shockproof and comfortable grip.
- With rubber button for better operation.
- Attractive appearance.

Rubber Coat

Patent:201030582025.X

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-3N27	3m/10ft	12.5mm	500×320×275	120	25/23
LD-5N27E	5m/16ft	19mm	505×350×260	120	27/25
LD-5N27X	5m/16ft	25mm	570×195×325	120	36/34
LD-8N27X	8m/26ft	25mm	645×220×340	60	23/21

ProMeasure
STEEL TAPE

NEW

Series N25

Main Features

- Ergonomically and popular designed.
- Co-molded rubber case, shockproof and comfortable grip.
- Excellent locking system holds blade firmly.

Shockproof

Patent:201030514261.8

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-3N25W	3m/10ft	16mm	405×335×245	120	23/21
LD-5N25E	5m/16ft	19mm	455×280×200	120	27/25
LD-7HN25X	7.5m/25ft	25mm	455×280×250	60	22/20

NEW

Series N23

Main Features

- High quality rubber case,Shockproof and comfortable grip.
- With rubber button for better operation.
- Attractive appearance.

Rubber Coat

Patent:201030223760.1

Model			(mm) QTY.LBS.CU FT	PCS	KG
3N23W	3m/10ft	16mm	670×340×340	120	27/25
5N23E	5m/16ft	19mm	670×340×340	120	27/25
7HN23E	7.5m/25ft	25mm	670×340×340	60	27/25

NEW

Series N21

Main Features

- Ergonomically and popular designed.
- Co-molded rubber case, shockproof and comfortable grip.
- Excellent locking system holds blade firmly.

Shockproof

Patent:201030223764.X

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-3N21W	3m/10ft	16mm	505×315×270	120	21/19
LD-5N21E	5m/16ft	19mm	570×370×280	120	24/22
LD-8N21X	8m/26ft	25mm	640×350×200	60	20/18

NEW

Series N20

Main Features

- With first creat upper temporary stop design, complying with the principle of ergonpmics.
- Prolonged tape mouth to have better feel and lessen the possibility of hurting hand.
- Double colour injection,attractive appearance.
- Beautiful and elegant appearance.

Created Design of Stop Button

Patent:200830127296.9

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-5N20E	5m/16ft	19mm	455×280×200	60	21/19
LD-3N20W	3m/10ft	16mm	405×335×245	120	23/21

Series 81, -1

Main Features

- Co-molded rubber case with stainless steel label,for comfortable grip and shockproof;
- Nylon coated blade more durable longer life time,accuracy EEC class II;
- Self lock system,allows blade to be extended smoothly.
- Easy to use thumb button.Push button retrieval.
- High quality strap and chrome-plated hook.
- Double colour injection,attractive appearance.

Series 81 -1

Self lock Stainless steel case

Patent:200830127295.4

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-381W	3m/10ft	16mm	640×330×280	120	19/17
LD-581E	5m/16ft	19mm	670×360×300	120	22/20
LD-581X	5m/16ft	25mm	670×360×345	120	23/21
LD-881X	8m/26ft	25mm	720×215×350	60	25/23

HOT

Series N18

Main Features

- High quality stainless steel case with rubber protect shockproof.
- Co-molded rubber button for comfortable grip.
- Double color injection,attractive appearance.
- Provide powerful locking to hold the blade securely at any position.

Metal Case

Patent:200820083622.5

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-5N18E	5m/16ft	19mm	620×270×220	120	25/23
LD-8N18X	8m/26ft	25mm	455×280×220	60	21/19

ProMeasure
STEEL TAPE

HOT

Series N17

Main Features

- High quality rubber case,Shockproof and comfortable grip.
- With rubber button for better operation.
- Attractive appearance.

High Quality Chrome

Patent:200730146868.3

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-3N17W	3m/10ft	16mm	630×330×315	120	23/22
LD-5N17E	5m/16ft	19mm	670×345×320	120	25/23
LD-8N17X	8m/26ft	25mm	720×210×350	60	21/19

HOT

Series N12

Main Features

- Best quality rubber case,shockproof.
- Attractive appearance and comfortable touch.
- Self lock system allows blade securely at any positon.

Self look & shockproof case

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-3N12W	3m/10ft	16mm	500×320×275	120	25/23
LD-5N12E	5m/16ft	19mm	505×350×260	120	27/25
LD-5N12X	5m/16ft	25mm	570×195×325	120	36/34
LD-7HN12X	7.5m/25ft	25mm	645×220×340	60	23/21
LD-10N12X	10m/33ft	25mm	720×310×230	60	32/30

HOT

Series N09

Main Features

- Three stop buttons,easy for operation.
- With rubber cover,attractive appearance and comfortable touch.
- Harmonized design as per ergonomics.

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-2N09W	2m/6ft	16mm	630×330×315	120	11/10
LD-2HN09W	2.5m/9ft	16mm	630×330×315	120	14/12
LD-3N09W	3m/10ft	16mm	630×330×315	120	17/15
LD-5N09E	5m/16ft	19mm	670×345×320	120	27/25
LD-5N09X	5m/16ft	25mm	670×345×320	120	27/25
LD-7HN09X	7.5m/25ft	25mm	720×210×350	60	25/23
LD-8N09X	8m/26ft	25mm	720×210×350	60	26/24
LD-10N09X	10m/33ft	25mm	720×210×350	60	30/28

HOT



Series N10

Patent:200730002195.4

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-3N10	3m/10ft	12.5mm	500×320×275	120	25/23
LD-3N10W	3m/16ft	16mm	505×350×260	120	27/25
LD-5N10E	5m/16ft	19mm	570×195×325	120	36/34
LD-7HN10X	7.5m/25ft	25mm	645×220×340	60	23/21
LD-8N10X	8m/26ft	25mm	720×310×230	60	32/30

Series N03

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-2N03	2m/6ft	12.5mm	420×320×205	120	11/9
LD-3N03	3m/10ft	12.5mm	420×330×205	120	16/14
LD-5N03E	5m/16ft	19mm	465×365×235	120	24/22
LD-7HN03X	7.5m/25ft	25mm	530×260×220	60	26/24

HOT

Series N02

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-2N02	2m/6ft	12.5mm	420×305×205	120	11/9
LD-3N02	3m/10ft	12.5mm	420×330×205	120	16/14
LD-3N02W	3m/10ft	16mm	425×330×275	120	17/15
LD-5N02E	5m/16ft	19mm	485×380×305	96	24/22
LD-5N02X	5m/16ft	25mm	485×390×340	96	26/24
LD-7HN02X	7.5m/25ft	25mm	430×350×460	72	28/25

Series 99

Patent:200430003099.9

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-399W	3m/10ft	16mm	510×325×260	96	13/12
LD-399E	3m/10ft	19mm	510×325×260	96	12/11
LD-599E	5m/16ft	19mm	340×250×385	60	16/14
LD-7H99X	7.5m/25ft	25mm	385×320×290	48	27/25

Series 97

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-297W	2m/6ft	16mm	640×350×270	120	13/12
LD-397	3m/10ft	12.5mm	640×340×260	120	13/12
LD-397W	3m/10ft	16mm	640×350×270	120	16/14
LD-597E	5m/16ft	19mm	670×350×285	120	25/23
LD-7H97X	7.5m/25ft	25mm	720×210×310	60	23/21
LD-897X	8m/26ft	25mm	720×210×310	60	24/22

Series 96

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-296	2m/6ft	12.5mm	430×380×280	200	21/19
LD-396	3m/10ft	12.5mm	430×380×280	200	23/21
LD-396W	3m/10ft	16mm	420×390×300	200	26/24
LD-596E	5m/16ft	19mm	470×320×210	100	21/19
LD-896X	8m/26ft	25mm	510×235×210	50	20/18

Series 92

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-392	3m/10ft	12.5mm	640×340×460	240	22/20
LD-392W	3m/10ft	16mm	640×350×300	120	23/21
LD-592E	5m/16ft	19mm	670×370×310	120	25/23
LD-5H92E	5.5m/18ft	19mm	670×370×310	120	26/24
LD-7H92X	7.5m/25ft	25mm	720×205×300	60	27/25
LD-892X	8m/26ft	25mm	720×205×300	60	27/25

Series 90

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-290	2m/6ft	12.5mm	630×330×250	240	13/12
LD-290W	2m/6ft	16mm	630×340×270	120	14/12
LD-390	3m/10ft	12.5mm	630×330×210	120	15/13
LD-390W	3m/10ft	16mm	630×340×270	120	16/14
LD-590E	5m/16t	19mm	670×360×280	120	26/24
LD-7H90X	7.5m/25ft	25mm	720×210×320	60	22/20
LD-890X	8m/26ft	25mm	720×210×320	60	23/21

HOT

Series 89

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-389W	3m/10ft	16mm	640×340×310	120	20/18
LD-589E	5m/16ft	19mm	670×360×315	120	28/26
LD-589X	5m/16ft	25mm	670×360×365	120	35/33
LD-7H89X	7.5m/25ft	25mm	720×215×360	60	24/22

Series 88

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-288	2m/6ft	12.5mm	640×340×230	120	
LD-388	3m/10ft	12.5mm	640×340×230	120	13/11
LD-588E	5m/16ft	19mm	640×340×270	120	22/20
LD-7H88X	7.5m/25ft	25mm	720×210×300	60	22/20
LD-1088X	10m/33ft	25mm	720×210×330	60	28/26

Series 87

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-387W	3m/10ft	16mm	630×340×260	120	16/14
LD-3H87W	3.5m/12ft	16mm	630×340×260	120	16/14
LD-587E	5m/16ft	19mm	550×275×350	120	27/25
LD-587X	5m/16ft	25mm	670×350×305	120	31/29
LD-5H87X	5.5m/18ft	25mm	670×350×305	120	32/30
LD-7H87X	7.5m/25ft	25mm	510×240×225	60	22/20
LD-887X	8m/26ft	25mm	480×195×280	60	22/20
LD-1087X	10m/33ft	25mm	510×240×225	60	27/25

Series 86

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-286	2m/6ft	12.5mm	560×230×390	120	12/10
LD-386	3m/10ft	12.5mm	640×340×240	120	17/15
LD-386W	3m/10ft	16mm	640×330×280	120	19/17
LD-3H86	3.5m/12ft	12.5mm	640×340×240	120	17/15
LD-3H86W	3.5m/12ft	16mm	640×330×280	120	19/17
LD-586E	5m/16ft	19mm	670×360×300	120	29/27
LD-586X	5m/16ft	25mm	670×360×300	120	35/33
LD-7H86X	7.5m/16ft	25mm	720×215×350	60	25/23
LD-886X	8m/26ft	25mm	720×210×270	60	25/23
LD-886G	8m/26ft	32mm	455×280×220	60	25/23
LD-986G	9m/30ft	32mm	455×280×220	60	27/25
LD-1086X	10m/33ft	25mm	510×290×200	60	27/25
LD-1086G	10m/33ft	32mm	510×290×250	60	29/27

ProMeasure
STEEL TAPE

Series 85

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-285	2m/6ft	12.5mm	405×380×280	240	20/18
LD-385	3m/10ft	12.5mm	405×380×280	240	22/20
LD-385W	3m/10ft	16mm	405×380×280	240	23/21
LD-385E	3m/10ft	19mm	405×380×280	240	28/26
LD-3H85	3.5m/12ft	12.5mm	405×380×280	240	23/21
LD-3H85W	3.5m/12ft	16.5mm	405×380×280	240	24/22
LD-585W	5m/16ft	16mm	405×380×280	240	26/24
LD-585E	5m/16ft	19mm	405×335×245	120	21/19
LD-585X	5m/16ft	25mm	405×340×277	120	22/20
LD-5H85X	5.5m/18ft	25mm	405×340×277	120	23/22
LD-7H85X	7.5m/25ft	25mm	455×280×200	60	21/19
LD-885X	8m/26ft	25mm	455×280×220	60	27/25
LD-885G	8m/26ft	32mm	420×270×200	60	27/25
LD-1085X	10m/33ft	25mm	510×290×200	60	27/25
LD-1085G	10m/33ft	32mm	510×290×420	60	27/25

Series 84-1

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-284-1	2m/6ft	12.5mm	405×380×360	200	25/23
LD-384-1	3m/10ft	12.5mm	455×370×340	200	25/23
LD-584-1E	5m/16ft	19mm	430×380×190	100	20/18
LD-7H84-1X	7.5m/25ft	25mm	480×420×245	50	18/16
LD-884-1X	8m/26ft	25mm	255×230×180	50	18/16

VISIBLE SPRING

Series 80

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-580X	5m/16ft	25mm	380×280×360	100	25/23

HOT

Series 79

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-279	2m/6ft	12.5mm	640×340×240	120	16/14
LD-379W	3m/10ft	16mm	640×330×280	120	17/15
LD-379E	3m/10ft	19mm	640×330×280	120	19/17
LD-579W	5m/16ft	16mm	500×350×235	120	19/17
LD-579E	5m/16ft	19mm	670×360×300	120	29/27
LD-579X	5m/16ft	25mm	670×360×345	120	35/33
LD-7H79X	7.5m/25ft	25mm	720×215×350	60	24/22
LD-879X	8m/26ft	25mm	720×215×350	60	25/23

Series 83

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-383E	3m/10ft	19mm	380×280×210	105	16/14
LD-583X	5m/16ft	25mm	480×380×385	60	16/14
LD-883X	8m/26ft	25mm	480×380×395	60	18/16

Series 82

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-382	3m/16ft	12.5mm	630×330×210	120	14/12
LD-582E	5m/16ft	19mm	670×360×280	120	26/24
LD-582X	5m/16ft	25mm	670×360×310	120	31/29
LD-5H82X	5.5m/18ft	25mm	670×360×310	120	31/29
LD-7H82X	7.5m/25ft	25mm	720×210×320	60	22/20
LD-882X	8m/26ft	25mm	620×200×450	60	23/21

Series 77

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-377W	3m/10ft	16mm	630×340×230	120	13/11
LD-3H77	3.5m/12ft	12.5mm	630×340×260	120	16/14
LD-577E	5m/16ft	19mm	670×340×270	120	26/24
LD-7H77X	7.5m/25ft	25mm	720×210×300	60	22/20
LD-877X	8m/26ft	25mm	720×210×300	60	23/21
LD-1077G	10m/33ft	32mm	720×210×300	60	28/26

Series 68

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-268W	2m/6ft	16mm	380×365×280	200	16/14
LD-368	3m/10ft	12.5mm	395×325×275	200	20/18
LD-368W	3m/10ft	16mm	380×365×280	200	24/22
LD-3H68	3.5m/12ft	12.5mm	395×325×275	200	26/24
LD-3H86W	3.5m/12ft	16mm	380×365×280	200	21/19
LD-568W	5m/16ft	16mm	530×320×190	120	24/22
LD-568E	5m/16ft	19mm	525×205×320	120	24/22
LD-568X	5m/16ft	25mm	440×230×320	100	18/16
LD-7H68X	7.5m/25ft	25mm	440×230×200	50	24/22
LD-1068X	10m/33ft	25mm	500×225×215	50	32/29

ProMeasure
STEEL TAPE



Series 53-5

Double side printed steel tape measure

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-253	2m/6ft	12.5mm	640×340×240	120	17/15
LD-353	3m/10ft	12.5mm	640×340×240	120	19/17
LD-353W	3m/10ft	16mm	640×340×280	120	18/16
LD-553E	5m/16ft	19mm	670×360×300	120	29/27
LD-553X	5m/16ft	25mm	670×360×345	120	35/33
LD-7H53X	7.5m/25ft	25mm	720×215×350	60	25/23
LD-1053X	10m/33ft	25mm	720×215×370	60	35/33

Series 57

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-357	3m/10ft	12.5mm	630×330×270	120	15/13
LD-557E	5m/16ft	19mm	670×360×270	120	24/22
LD-7H57X	7.5m/25ft	25mm	460×400×260	60	23/21
LD-857X	8m/26ft	25mm	460×400×260	60	25/23

Series G1012

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-G1012	10m/33ft	25mm	630×320×228	50	17/15

Height Measuring Tape (LD-SG01)

Item No.	Specification	Pack. dimen.(mm)	QTY	G.W/N.W(kg)
101054001	2.5m	610×415×255	50	8/7

LD-L10

LD-L104

LD-C05

LD-C03

Main Features:

- Small and handy,easy to carry.
- Attractive appearance.

- If you need any other product for gift, please tell us,we can design it just for you

Model			(mm) QTY.LBS.CU FT	PCS	KG
L10	1m	6mm	285×260×210	300	11/9
L104	1m	10mm	248×247×223	300	16/14

▼ PRODUCT IS DISCONTINUED

Series 53

Series 86-2

Series N07

Series N06

Series N29, -1

Series N26

Series N24

Series N22

Series N19

Series N11

Series N16

Series SX01

Series N15

LD-558E

LD-570E

LD-593E

LD-595E

LD-509E

LD-556E

LD-567-1E

OLD PRODUCTS DISPLAY
LOOK BACK TAPE HISTORY

LD-P319

LD-571E

LD-578E

ProMeasure
LONG STEEL TAPE

Main Features:

- 3X fast retracting the blade
- Co-molded rubber handle design,offers comfortable holding feel
- High quality blade with clear graduation

Packing Date:

Patent:ZL 2014 3 0075737.0

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-GJ3019	30m	12.5mm			
LD-GJ3019	50m	12.5mm			

Main Features:

- Metal material frame&color oxidation surface treatment;
- High flexible handle with 2-injected TPR cover;
- A high quality gear inside for fast rewinding;
- Cool&popular appearance design;
- Nylon coated blade,more durable longer life expectancy.

Packing Date:

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-GJ3011	30m	12.5mm	490×355×300	20	23/21
LD-GJ5011	50m	12.5mm	490×355×300	20	29/27

HOT 3XFast retracting long steel tape

Series G18

Main Features

- 3X Fast retracting the blade.
- Co-molded rubber handle design,offers comfortable holding feel.
- High quality&comfortable handle.

Patent:200920123162.9

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-G3018	30m/100ft	12.5mm	510×265×155	20	13/11
LD-G5018	50m/165ft	12.5mm	510×305×180	20	18/16

Series G11

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-G1011	10m/33ft	10mm	730×420×230	60	15/13
LD-G1511	15m/50ft	10mm	730×420×230	60	18/16
LD-G2011	20m/66ft	10mm	730×420×230	60	21/19
LD-G3011	30m/100ft	10mm	730×420×230	60	27/25

Series G09

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-G1009	10m/33ft	12.5mm	390×210×190	50	12/10
LD-G1509	15m/50ft	12.5mm	365×265×270	50	16/14
LD-G2009	20m/66ft	12.5mm	365×265×270	50	20/18
LD-G3009	30m/100ft	12.5mm	365×265×270	50	27/25
LD-G5009	50m/165ft	12.5mm	325×300×180	20	18/16

Series G02

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-G1002	10m/33ft	10mm	420×190×175	50	9/8
LD-G1502	15m/50ft	10mm	420×252×200	50	13/12
LD-G2002	20m/66ft	10mm	420×252×200	50	16/14
LD-G3002	30m/100ft	10mm	420×252×245	50	21/19

Series G01

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-G1001	10m/33ft	10mm	355×190×170	50	9/8
LD-G1501	15m/50ft	10mm	355×190×170	50	12/10
LD-G2001	20m/66ft	10mm	355×250×220	50	16/14
LD-G3001	30m/100ft	10mm	355×265×235	50	23/21
LD-G5001	50m/165ft	10mm	540×340×180	30	24/22

NEW

3X Fast retracting open reel long steel tape

Series GJ10

Main Features

- 3X Fast retracting the blade,save time.
- With high quality strap, easy operation;
- High quality&comfortable handle.;
- Metal positioning tip.

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-GJ3010	30m/100ft	12.5mm	570×340×250	10	9/7
LD-GJ5010	50m/165ft	12.5mm	570×340×250	10	11/9

NEW

3X Fast retracting open reel long steel tape

Series GJ9

Main Features

- 3X Fast retracting the blade,save time.
- With high quality strap, easy operation;
- High quality&comfortable handle.;

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-GJ209	20m/66ft	12.5mm	320×423×268	10	9/7
LD-GJ309	30m/100ft	12.5mm	345×485×268	10	12/10
LD-GJ509	50m/165ft	12.5mm	415×605×268	10	18/16

ProMeasure
LONG STEEL TAPE

Series GJ6 / GJ6-1

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-GJ206	20m/66ft	12.5mm	480×330×230	10	5/4
LD-GJ306	30m/100ft	12.5mm	480×330×220	10	7/6
LD-GJ506	50m/165ft	12.5mm	480×330×220	10	9/8
LD-GJ1006	100m/330ft	12.5mm	480×330×230	10	18/16
LD-GJ206-1	20m/66ft	12.5mm	390×320×210	10	6/5
LD-GJ306-1	30m/100ft	12.5mm	390×320×210	10	9/8
LD-GJ506-1	50m/165ft	12.5mm	390×320×210	10	14/13

Series GJ6

Series GJ6-1

Series GJ8

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-GJ308	30m/100ft	12.5mm	380×320×185	10	14/13
LD-GJ508	50m/165ft	12.5mm	380×320×185	10	19/18

Series GJ7

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-GJ207	20m/66ft	12.5mm	480×330×230	10	6/5
LD-GJ307	30m/100ft	12.5mm	480×330×220	10	12/11
LD-GJ507	50m/165ft	12.5mm	480×330×220	10	16/14

Series GJ2

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-GJ202	20m/66ft	10mm	480×423×268	10	3/2
LD-GJ302	30m/100ft	10mm	345×485×268	10	4/3
LD-GJ502	50m/165ft	10mm	415×605×268	10	8/7

▼ PRODUCT IS DISCONTINUED

Series DG16

Series G08

Series GJ1

Series GJ15

Series GJ1 / GJ15

With high quality of PVC as the material for tape blade, ABS for the case, with clear printing of graduation and up-to-date models, it is widely used in architecture engineering. sports games and field work for length measurement. The manual rolling fibreglass long tape has the lengths arranging from 5m to 100m in case or open reel. The tape blade is printed one side or double sides with only metric, or only British or metric-British graduations. It has features of erasion and erosian resistence, convenience for use. being handy and economical of customer's benefit.

For max. permissible tolerance see the table. if the length is within the minimal divsion value:

The max. permissible tolerance is calculated as per the following formula. if the number of length is bigger than the minimal division value:

△ =±(1.2+0.8 · L)mm EEC Glass Ⅲ △ =±(0.6+0 4 · L)mm

Note: △ Max, permissible tolerance in mm. L-Length value. The bigger and most approx round-numbered value in metre is taken in case a measured length is less than around-numbered multiple of one metre The permissible tolerance is to increase by±0 5mm if an extremity or combined measuring tool is used.

Reference Symbol:

LD - J 50 L

- L — Series Number
- 50 — Length(m)
- J — Long tape in frame
- LD — Code of company

Reference Mark for Tape Width:

Minimal division value	Max.permissble tolerance
i≤1	±0.3
1<i≤10	±1
10<i≤100	±1.5

BLADE GRADUATION

021		Metric Graduation
022		British-metric Graduation
023		British Graduation
024		Metric Graduation
025		Tailor`s tape(Metric Graduation)
026		Tailor`s tape(inch Graduation)

Blade Graduation subject to the final products

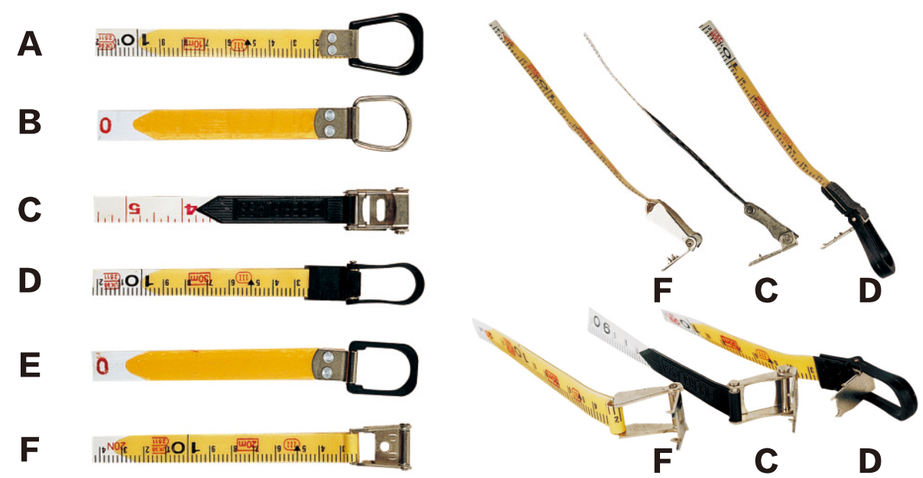

ProMeasure
Fibreglass Tpae

Series 15

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-1015	10m	13mm	530×270×300	60	14/12
LD-1515	15m	13mm	530×270×300	60	17/15
LD-2015	20m	13mm	530×350×385	60	20/18
LD-3015	30m	13mm	530×350×385	60	26/24
LD-5015	50m	13mm	550×242×415	30	20/18

Series 12

Patent: 00305571.X

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-1012	10m	12.5mm	550×295×295	60	13/11
LD-1512	15m	13mm	550×295×295	60	17/15
LD-2012	20m	13mm	550×295×295	60	20/18
LD-3012	30m	13mm	550×350×350	60	26/24
LD-5012	50m	13mm	550×225×430	30	20/18

Series 09

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-1009	10m	13mm	580×235×235	60	13/11
LD-1509	15m	13mm	580×235×235	60	17/15
LD-2009	20m	13mm	580×295×295	60	20/18
LD-3009	30m	13mm	580×350×350	60	26/24
LD-5009	50m	13mm	580×350×350	30	20/18

Series 08

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-1008	10m	13mm	550×235×235	60	12/10
LD-1508	15m	13mm	550×295×295	60	16/14
LD-2008	20m	13mm	550×295×295	60	20/18
LD-3008	30m	13mm	550×350×350	60	26/24
LD-5008	50m	13mm	550×225×430	30	20/18

Series 06

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-1006	10m	13mm	700×235×235	60	13/11
LD-1506	15m	13mm	700×295×295	60	17/15
LD-2006	20m	13mm	700×295×295	60	20/18
LD-3006	30m	13mm	700×350×350	60	26/24
LD-5006	50m	13mm	700×225×430	30	20/18

Main Features:

- 3X Fast retracting the blade,save time.
- Square ring easy to use;
- Co-molded rubber case offers comfortable girl;
- With high quality strap PVC blade,clear printed,erosion resistant and wearable.

Packing Date:

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-2017	20m	13mm	530×380×520	60	22/20
LD-3017	30m	13mm	530×380×520	60	27/25
LD-5017	50m	13mm	500×470×430	30	24/22

ProMeasure
Fibreglass Tpae

Series 05

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-1005	10m	13mm	620×235×235	60	12/10
LD-1505	15m	13mm	620×295×295	60	16/14
LD-2005	20m	13mm	620×295×295	60	20/18
LD-3005	30m	13mm	620×350×350	60	26/24
LD-5005	50m	13mm	620×225×430	30	20/18

Series 01

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-1001	10m	13mm	550×235×235	60	12/10
LD-1501	15m	13mm	550×295×295	60	16/14
LD-2001	20m	13mm	550×295×295	60	20/18
LD-3001	30m	13mm	550×350×350	60	26/24
LD-5001	50m	13mm	550×225×430	30	20/18

▼ PRODUCT IS DISCONTINUED

Series P08

Series 07

Series 02

LD-D3016

Automatic fibreglass tape

Main Features

- Fast retracting the bladey by motor.
- Co-molded rubber handle design, offers comfortable holding feel.
- Shockproof guard ring design.
- Possess hand power function.

Main Features:

- Forged aluminium tip,chrome-plated handle,metal color,high grade.
- Soft handle with better feel.
- Printed label,beautiful and elegant.
- Triple winding speed.
- Beautiful and elegant general appearance.

Packing Date:

Patent:200930182029.6

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-J3019	30m	13mm	570×340×250	10	8/6

Main Features:

- Forged aluminium tip,chrome-plated handle,metal color,high grade.
- Soft handle with better feel.
- Printed label,beautiful and elegant.
- Triple winding speed.
- Beautiful and elegant general appearance.

Packing Date:

Patent:200930182029.6

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-J3010	30m	13mm	570×340×250	10	8/6

3X Fast retracting open reel fiberglass tape:

Main Features

- 3X Fast retracting the blade,saves time
- Co-molded rubber case, offers comfortable holding feel.
- High duty frame&comfortable handle,withstands extreme conditions.

Series J9

Patent:200830348839.X

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-J309	30m	13mm	345×340×455	12	9.5/8.5
LD-J509	50m	13mm	550×400×260	10	10/8
LD-J1009	100m	13mm	600×470×200	10	18/16

Series J7

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-J207	20m	13mm	470×330×420	20	9/8
LD-J307	30m	13mm	470×330×420	20	12/10

Series J6

Series J6-1

Series J6 / J6-1

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-J206	20m	13mm	430×260×360	20	9/8
LD-J306	30m	13mm	430×290×410	20	12/10
LD-J506	50m	13mm	440×330×490	10	16/14
LD-J206-1	20m	13mm	430×260×360	20	9/8
LD-J306-1	30m	13mm	400×315×400	20	12/10
LD-J506-1	50m	13mm	400×370×500	20	16/14

Series J3

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-J203	20m	13mm	430×260×360	20	9/8
LD-J303	30m	13mm	460×340×500	20	12/10
LD-J503	50m	13mm	470×377×512	20	16/14

Series J2

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-J202	20m	13mm	420×270×350	20	9/8
LD-J302	30m	13mm	420×305×410	20	12/10
LD-J502	50m	13mm	420×340×500	20	16/14

Series J1

Model			(mm) QTY.LBS.CU FT	PCS	KG
LD-J101	10m	13mm	400×220×260	20	7/6
LD-J201	20m	13mm	420×270×350	20	9/8
LD-J301	30m	13mm	420×305×500	20	12/10
LD-J501	50m	13mm	420×340×500	20	16/14
LD-J1001	100m	13mm	420×340×440	10	16/14

DISTANCE MEASURING WHEEL

LD-DW1

LD-DW2

LD-DW1

DISTANCE MEASURING WHEEL

Patent:01254325.X

Model	(mm) QTY.LBS.CU FT	PCS	KG
LD-DW1	345×320×495	2	5/4
LD-DW1	625×345×495	4	10/8
LD-DW1	775×345×495	5	12/10
LD-DW1	930×345×495	6	14/12.5

LD-DW2

Main Features

- Handy structure,stretchable handle,easy to carry.
- With digital display and memory.
- With metric and inch dual system,you may also convert in between.
- With stand.
- Double injection wheel,even suitable for slippery ground.

Technical Data:

- Display resolution:0.1m
- Tolerance:<0.5%
- Measuring range:0-10000m
- Power supply:2XLR3 batteries

DIGITAL DISPLAY MEASURING WHEEL

Patent:2006301368.8

Model	(mm) QTY.LBS.CU FT	PCS	KG
LD-DW2	360×200×730	4	6/4.5
LD-DW2	450×190×720	5	8/6
LD-DW2	360×275×720	6	9/7

ProLevel
Level

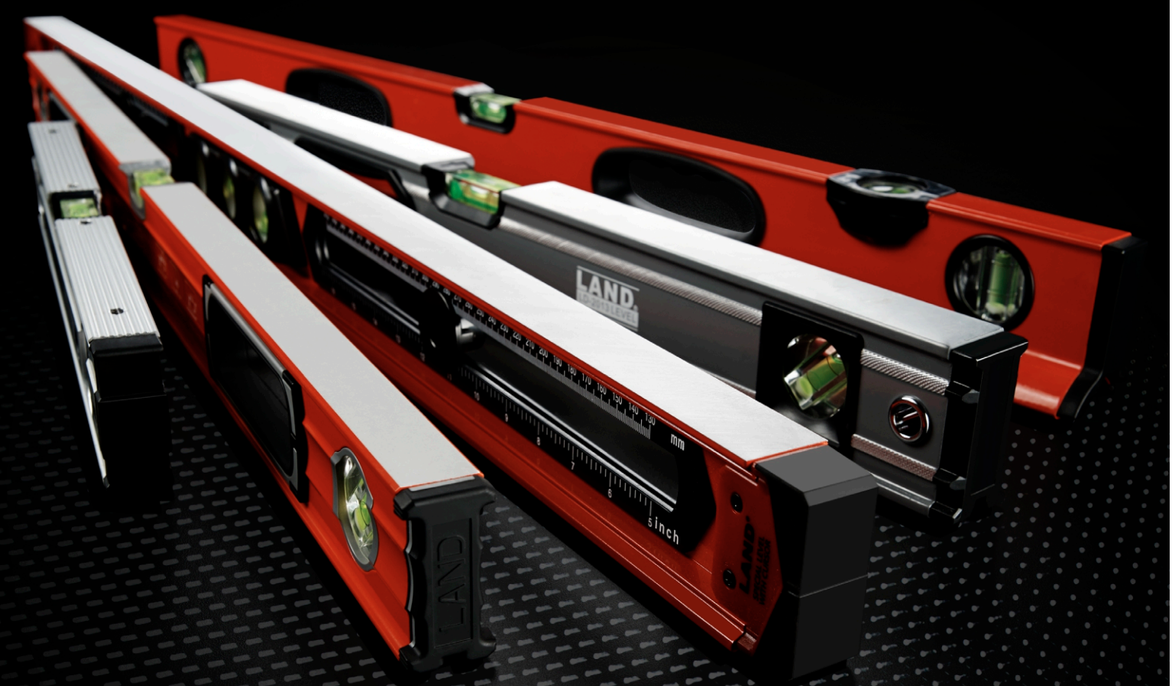

With the application of high quality aluminum alloy and high transparent, super clear vials and aluminum spirit level features high sensitivity to the variation of measured surface position when it is placed on an object, It is widely applied not only in the architecture engineering, room decoration and sports to examine the horizontal and vertical position of an object, and even the object at 45° angle, but in people's daily life to detect the levelness as well.

It acquires up-to-date models and excellent presentation with the style of frame, bridge, compound and bar shapes, it can also be printed with metric or British graduation on the sides of the level.It offers convenience to customers.

Reference Symbol:

Type code	Meaning
J	Bridge
K	Frame
S	Plastic
C	Magnetic
G	Steel Tape

Struc code	Meaning
A	2 vials, horizontal & vertical resp
B	3 vials,horizontal & 45° leaning resp
C	2 vials, & with graduation
D	3 vials, & with graduation

Main Features:

- High accuracy vials with two lines, guaranteed by numerical control processing, twice higher accuracy than normal one
- Milled on both top and bottom sides, more precise and more professional
- Colorful painted surface with high intensity to be more durable
- Shockproof with co–molded cap
- Co–molded handle, with comfortable grip
- With or without magnet is optional

LD-2013

Main Features:

- High accuracy vials with three lines,guaranteed by numerical control processing,twice higher accuracy than normal one
- Milled on both top and bottom sides,more precise and more professional
- Colorful painted surface with high intensity to be more durable
- Shockproof with co-molded cap
- Co-molded handle, with comfortable grip (40cm without handle)
- With or without magnet is optional

LD-2007B

Main Features:

- CO-molded rubber handle,offers comfortable holding feel
- Co-molded rubber end caps protect against shock when dropped or bumped
- Aerofoil 180° vial seating design for better looking

LD-2007-2B

Main Features:

- Shiny and colourful oxidized level body.wearable, with high intensity
- TPR-covered caps to resist shock
- CO-molded rubber handle,offers comfortable holding feel
- High accuracy triplelined vials
- Magnetic bottom

LD-2007-3B

Main Features:

- High accuracy 180° vial.
- Super co-molded rubber handle,
- offers comfortable holding feel
- Co-molded rubber end caps protect against shock when dropped or bumped
- Magnetic bottom

LD-2014

Main Features:

- High accuracy vials with three lines,guaranteed by numerical control processing,twice higher accuracy than normal one
- Milled on both top and bottom sides,more precise and more professional
- Colorful painted surface with high intensity to be more durable

Patent:ZL 201430149436.8

LD-2010B/2010-1B

Main Features:

- UV Resistant Vial
- High Accuracy Vial

LD-2010-1B

LD-2009B

Main Features:

- High accuracy 180° vial.
- Super co-molded rubber handle, offer comfortable holding feel
- Co-molded rubber end caps,shockeproof
- With LED Light for darkness



LD-SX2002

Main Features:

- High quality almuninium alloy body,sandy finish
- 360 degree measurement
- Big LCD
- Sound reminder at 0° / 45° / 90°
- Data hold funtion
- When the level is put up side down,the display will turn the right side up automatically,easy for reading
- Conversion between slope and normal degree

Aluminium Patter(LD-LGC-3)

- Make the perfect surface

- CROSS ECTIONAL
- DIMENSINS 95×7.5mm

Item No.	Specification	Pack. dimen.(mm)	QTY	G.W/N.W(kg)
104061006	80cm	820×320×205	20	23/22
104061008	100cm	1020×320×205	20	29/28
104061009	120cm	1220×320×205	20	35/34
104061012	200cm	2020×320×205	20	58/57

Aluminium Patter(LD-LGC-6)

- Examine smoothness of the surface

- CROSS SETIONAL
- DIMENSIONS 90×20mm

Item No.	Specification	Pack. dimen.(mm)	QTY	G.W/N.W(kg)
104063008	100cm	1020×200×110	10	7.5/6.5
104063009	120cm	1220×200×110	10	9/8
104063010	150cm	1520×200×110	10	11/10
104063012	200cm	2020×200×110	10	15/13
104063014	300cm	3020×200×110	10	21.5/20

Aluminium Patter(LD-LGC-5)

- Scrap and make the surface balance

- CROSS SECTIONAL
- DIMENSIONS 95×18mm
- Floating rough surface

Item No.	Specification	Pack. dimen.(mm)	QTY	G.W/N.W(kg)
104063008	100cm	1020×200×110	10	7.5/6.5
104063009	120cm	1220×200×110	10	9/8
104063010	150cm	1520×200×110	10	11/10
104063012	200cm	2020×200×110	10	15/13.5
104063015	200cm	3020×200×110	10	15/13.5

Aluminium Patter(LD-LGC-2)

- Scrap and make the surface balance

- CROSS SECTIONAL
- DIMENSIONS 106×26mm
- Floating rough surface

Item No.	Specification	Pack. dimen.(mm)	QTY	G.W/N.W(kg)
104060008	100cm	1020×200×110	10	8.5/7.5
104060009	120cm	1220×200×110	10	10/9
104060010	150cm	1520×200×110	10	12/11
104060012	200cm	2020×200×110	10	16/14.5
104060014	300cm	3020×200×110	10	22.5/21

LD-SXJD-01 Digital Display Angle Fingder

Main Features:

- Oxidized aluminum alloy dody.
- Measuring angle between 0°-185°

Techical data:

- Accuracy:±1°
- Power supply:1×9V alkaline battery

LD-LS05JD

LD-JD01

Model	Product picture		PCS
LD-2008-1B			
LD-2003B			
LD-2005B		(length+18)×310×320mm (length+18)×310×200mm (length+18)×310×140mm (length+18)×165×140mm	50 30 20 10
LD-2003-2B		(length+18)×290×260mm (length+18)×290×164mm (length+18)×290×115mm (length+18)×155×115mm	50 30 20 10
LD-2003-3B		(length+18)×290×260mm (length+18)×290×164mm (length+18)×290×115mm (length+18)×155×115mm	50 30 20 10
LD-2003-4B		(length+18)×270×320mm (length+18)×270×200mm (length+18)×270×140mm (length+18)×145×140mm	50 30 20 10
LD-2002B			
LD-2002-1A		(length+18)×260×320mm (length+18)×300×340mm (length+18)×300×212mm (length+18)×300×148mm	50 50 30 20

ProLevel
Level

Model	Product picture		PCS
LD-2000B		(length+18)×240×320mm (length+18)×240×200mm (length+18)×240×140mm	50 30 20
LD-2000-1B		(length+18)×240×280mm (length+18)×240×178mm	50 30
LD-2001-1B		(length+18)×280×320mm (length+18)×280×200mm (length+18)×160×140mm	50 30 10
LD-98B		(length+18)×300×320mm (length+18)×300×200mm (length+18)×300×140mm	50 30 20
LD-97B		(length+18)×260×320mm (length+18)×260×200mm (length+18)×260×140mm	50 30 20
LD-97-4B		(length+18)×300×320mm (length+18)×300×200mm (length+18)×300×140mm	50 30 20
LD-97-3B		(length+18)×260×320mm (length+18)×260×200mm (length+18)×260×140mm	50 30 20
LD-97-1B		(length+18)×300×320mm (length+18)×300×200mm (length+18)×300×140mm	50 30 20

Model	Product picture		PCS
LD-95-1B		(length+18)×220×270mm (length+18)×220×270mm (length+18)×220×270mm	50 30 20
LD-95B			
LD-93-2B		(length+18)×245×260mm	50
LD-91-5B		(length+18)×210×265mm	50
LD-91-2B		(length+18)×230×270mm	50
LD-91-1B			
LD-91B		(length+18)×250×265mm	
LD-90-1B		(length+18)×260×265mm	

Model	Product picture		PCS
LD-88D		(length+18)×200×260mm	
LD-87B		(length+18)×265×290mm	
LD-87C		(length+18)×275×310mm	
LD-87D		(length+18)×275×310mm	
LD-82-1B		(length+18)×260×280mm	
LD-C95B			
LD-C82-1B			
LD-J89A			



With magnet

LD-J89C Patent:00332592.X

LD-J96A

LD-S93B



LD-C93B

LD-MF1

LD-S98G

COLOR SCHEME

AND MORE...

Specification		PCS	KG
S98A	240×250×172mm	100	9/8
S98A	530×310×520mm	120	14/12
S98A	530×310×440mm	100	11/10
S93B	520×310×440mm	100	12/10
C93B	630×290×290mm	100	10/8
S98G	520×220×260mm	100	11/10
MF1	380×300×460mm	36	5/3
MF1	480×260×200mm	100	12/11
MF1	630×290×290mm	100	10/8

▼ PRODUCT IS DISCONTINUED

LD-92B

LD-2008-2B

LD-2008B

LD-S98A

LD-SL06

Model	(mm) QTY.LBS.CU FT	PCS	KG
LD-SL-06	520×255×295	2	7/5.5

Main Features:

- Particular&trifurcate bottom,for firm operation.
- Co-molded rubber case,offers comfortable touch.
- With lock button.

Technical data:

Vertical and horizontal accuracy: ±0.5mm/m
Wavelength of the laser:650nm
Output: ≤1mw
Leveling scope: ±4°
Self leveling time <15s
Power supply:2×1.5V(AA)batteries
Working distance: ≤5m



LD-SL02

Patent:200430056057.0

Model	(mm) QTY.LBS.CU FT	PCS	KG
LD-SL-02	520×500×300	4	14/12
LD-SL-02	520×260×300	2	7/6

NEW

LD-SL07

Main Features:

- Pendulum Lock/Unlock
- Wall bracket
- 360°rotating base
- Co-molded rubber case,offers comfortable touch.

Technical data:

Vertical and horizontal accuracy: ±2mm/m
Wavelength of the laser:650nm
Output: ≤1mW
Leveling scope: ±6°
Self leveling time: ≤7s
Power supply:2×1.5V(AA)batteries
Working distance: ≤10m
Spread angle: ≤90°



LD-SL01

Patent:03351951.X

Model	(mm) QTY.LBS.CU FT	PCS	KG
LD-SL-01	515×440×280	4	12/10

Mini Laser Level

Main Features:
- Horizonatl measurement LED indicator.
- Manetic bottom for easy use on steel.
- May fix mini-tripod on the bottom of the level.

Technical Data:
- Accuracy:±2mm/m
- Laser power:<1mw
- Waelength:650nm
- Power supl:2×LR3 batteries

LD-LS15

Patent:2005300146397
200520115902.6

Model	(mm) QTY.LBS.CU FT	PCS	KG
LD-LS15	550×320×390	40	14/12

Main Features:
- Three laser lines on three directions at the same time. Two lines on the same level and another line is right angle to them.
- It has self-leveling function, which reduces the tolerance made by human operation.
- Also equipped with two pins to fix, as well as lock system (for the self-leveling mechanism.) after locked, you will get three reference lines on surface. One line is vertical to another two that is on the same level.

Technical Data:
- Accuracy: ±1mm/m
- Laser power: < 5 mw, < 1mw
- Wavelength: 650 nm, 635 nm
- Power supply: 2XLR6 batteries

LD-LS10

Three laser lines Generator

Patent:2005300146397
200520115902.6

Model	(mm) QTY.LBS.CU FT	PCS	KG
LD-LS10	680×250×320	20	9/8

Mini Laser Level

Main Features:
- Magnets on bottom,easy to use on steel surfacae.
- For both vertical and horizontal measuremrents,
- Attrcative appearance.

Technical Data:
- Accuracy:±1mm/m
- Laser power:<1mw
- Waelength:650nm

LD-LS11

Patent:2005300114651.8

Model	(mm) QTY.LBS.CU FT	PCS	KG
LD-LS11	400×340×370	24	12/11

LD-LS02

Patent:02304035.1

Model	(mm) QTY.LBS.CU FT	PCS	KG
LD-LS02	645×185×160	10	7/6

LD-LS03S

Patent:02345215.3

Model	(mm) QTY.LBS.CU FT	PCS	KG
LD-LS03S	520×300×300	40	15/13

LD-LS05JD

Patent:02260935.0

Model	(mm) QTY.LBS.CU FT	PCS	KG
LD-LS05JD	520×250×170	10	8/7

LD-LS2001S

Patent:01321959.6

Model	(mm) QTY.LBS.CU FT	PCS	KG
LD-LS2001S	540×300×310	40	14/12

Mecjeamism

Main Features:

- A type of integrated of instrument of light,mechanism and electricity.
- Auto rotating laser beam,easy to measure and set of a level reference surface.
- Widely used in construction work or measuremenet both indoor and outdoor.

Technical data:

- Accuracy: ±0.5mm/m
- Long vial accuracy: 0.05°=0.87mm/m
- Wavelength:635nm
- Power outout of the laser:≤1mw
- PowerDC:6V

LD-SC2 Rotary Laser

Patent:023393929.7
02260936.9

Model	(mm) QTY.LBS.CU FT	PCS	KG
LD-SC2	635×320×325	2	11/9

LD-SC1R Laser Lever

Model	(mm) QTY.LBS.CU FT	PCS	KG
LD-SC1R	635×320×325	2	11/9

Laser Level

Main Features:

- For both vertical and horizontal measurements.
- With adjustable base,this can be rotated at 360°.
- Widely used in architecture ,decoration,etc.

Technical Data:

- Accuracy:±1mm/m
- Wave length:650nm
- Power supply:2×1.5V
- Vial accuracy:0.057°=1mm/m

LD-LS01

Patent:01321769.0

Model	(mm) QTY.LBS.CU FT	PCS	KG
LD-LS01 small set	470×420×340	4	14/13
LD-LS01 big set	650×495×325	4	20/18
LD-LS01 mini set	560×420×185	4	11/9

LD-LS0140

LD-LS0140-1



LD-LS0140-2

LD-LS0140

Model	(mm) QTY.LBS.CU FT	PCS	KG
LD-LS0140	470×420×340	4	10/9

Laser Line Generator (mouse shaped)

Main Features:

- Small and attractive apperance.
- with two vials,for both vertical and horizontal measurements.

Technical Data:

- Accuracy:±2mm/m
- Laser power: <5mw,<1mw
- Waelength:650nm,635nm
- Power supply:2×LR3 batteries

LD-LS12

Model	(mm) QTY.LBS.CU FT	PCS	KG
LD-LS12	400×260×340	20	5/4

LD-T1001

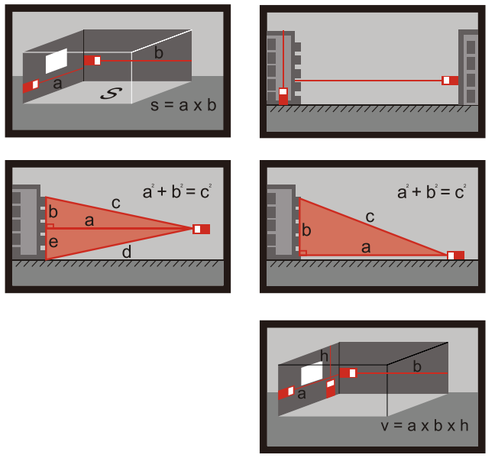

Laser Distance measure

Techinical specifications

Range: 0.1 to 100m
Area volume measurement: yes
Data addition/subtraction: yes
Continuous measurement: yes
Min/Max measurement: yes
Multi 4-line display: yes
Display Illumination: yes
Buzzer indication: yes
level: yes
Protection class: IP54
Measuring range: 0.05-100M
Measurement accuracy: ±2mm
Laser class:Class 2M Ⅱ
Laser type:620-690nm, <1mw
Operation temperature:0℃-+40℃
Storage temperature:-20℃-+70℃
Batteries life:5000max
Batteries type:AA LR6 2x1. 5V
Switch off laser beam without operation:30 seconds
Switch off instruments with inactivity:180 seconds
Dimension of Instrument:120*55*26mm
Weight without batteries:98g

Steel Ruler

Item No.	Specification	Pack. dimen.(mm)	QTY	G.W/N.W(kg)
113001001	150mm	280×200×90	500	10/8
113001002	300mm	360×320×90	400	27/25
113001003	500mm	565×260×100	200	29/27
113001004	600mm	665×240×50	100	18/16
113001005	1000mm	1080×110×50	40	15/13
113001006	1500mm	1600×200×50	30	31/28
113001007	2000mm	2100×200×50	30	42/39

Steel Square

Item No.	Specification	Pack. dimen.(mm)	QTY	G.W/N.W(kg)
113008001	150mm	580×210×190	120	13/11
113008002	200mm	460×305×220	120	17/15
113008003	250mm	520×400×160	120	23/21
113008004	300mm	430×370×210	60	12/11
113008005	350mm	430×370×210	60	15/13
113008006	500mm	540×430×210	60	17/15

Steel Square

Item No.	Specification	Pack. dimen.(mm)	QTY	G.W/N.W(kg)
113002001	150×300mm	350×200×160	100	14/13
113002002	250×500mm	590×300×80	50	12/11

Aluminium Ruler(LD-LZ-1)

Item No.	Specification	Pack. dimen.(mm)	QTY	G.W/N.W(kg)
104056001	300mm	320×210×285	10	6/5.5
104056002	350mm	370×210×285	10	7/6.5
104056003	400mm	420×210×285	10	8/7.5
104056004	450mm	470×210×285	10	9/8.5
104056005	500mm	520×210×285	10	10/9.5
104056006	550mm	570×210×285	10	11/10
104056007	600mm	620×210×285	10	12/11
104056008	700mm	720×210×285	10	14/13
104056009	800mm	820×210×285	10	16/15
104056010	900mm	920×210×285	10	18/16.5
104056011	1000mm	1020×210×285	10	20/18
104056012	1200mm	1220×210×285	10	24/22

Triangle Ruler

Item No.	Specification	Pack. dimen.(mm)	QTY	G.W/N.W(kg)
113004011	150mm	330×170×190	80	10/9
113004012	200mm	445×230×290	80	18/17

High Grade steel Triangle Ruler

Item No.	Specification	Pack. dimen.(mm)	QTY	G.W/N.W(kg)
113004007	120mm	670×360×255	10/100	13/11
113004008	180mm	975×475×305	10/100	23/21

Aluminium Ruler(LD-LZ-4)

Item No.	Specification	Pack. dimen.(mm)	QTY	G.W/N.W(kg)
104058001	300mm	335×315×215	60	5.5/5
104058002	350mm	385×315×215	60	6.5/6
104058003	400mm	435×315×215	60	7.5/7
104058004	450mm	485×315×215	60	8.5/8
104058005	500mm	535×315×215	60	9/8.5
104058006	550mm	585×315×215	60	10/9
104058007	600mm	635×315×215	60	11/10
104058008	700mm	735×315×215	60	13/12
104058009	800mm	835×315×215	60	14/13
104058010	900mm	935×315×215	60	16.5/15
104058011	1000mm	1035×315×215	60	18.5/17
104058012	1200mm	1235×315×215	60	22/20

Combination Square

Item No.	Specification	Pack. dimen.(mm)	QTY	G.W/N.W(kg)
113006002	12"/300mm	570×365×320	60	15/14

Angle Finder (LD-JC01)

Item No.	Specification	Pack. dimen.(mm)	QTY	G.W/N.W(kg)
113013001		450×380×300	20/1	15/13

Tower Tape

Item No.	Specification	Pack. dimen.(mm)	QTY	G.W/N.W(kg)
113010001	3m	1100×210×110	10	13/11.5
113010002	5m	1020×400×140	5	15/12.5
113010003	8m	1700×400×140	5	18/15.5

Ruler

Item No.	Specification	Pack. dimen.(mm)	QTY	G.W/N.W(kg)
113009001	3m	1190×190×110	12	11/9.5
113009002	5m	1260×225×135	12	21/19

Manner of packaging

Paper card

PVC/PP card PVC/PP

Multi pack

Double blister card

Blister sliding card

Standing double blister card

Color box

Display box

Color box

White box

Plastic shrink

Plastic card+shrink

T shape hook

Cr-chromed magnetc hook

Embedded type hook (with"1" stamped)

Double side magnetic hook

Cr-chromed hook

Normal hook without hole

Magnetic hook (three rivets)

Black hook

Strong magnetic hook

Normal hook

Silk strap

High grade silk strap

Rubber strap

COLOR SCHEME

If you need other design or method for packing,please don't hesitate to inform us, we sure me can make it accordingly.

Our company is pursuing the perfect of product, and improving the quality of product constantly.The product in this catalogue may be improved without separate advice.

Prefix template for MID & CE

Land products are in conformity with the basic requirements under the “Measuring Instruments Directive 2004/22/EC ●f the European parliament and of the Council on Measuring Instruments”as well as the special requirements under Annex MI-008 material measures for Class I and ClassII accuracy.

1. Total length
2. Class of accuracy
3. Mark of manufacturer
4. Conformite Europeenne
5. Year of manufacturing
6. Code of notify body
7. Number of EC-typecertificate
8. Tempreture in accuracy test (it is defaulted as 20℃if not printed)
9. Tensile force in accuracy test (steel tape-50N; Fibreglass measuring tape-10N/20N)

steel tape

011



012

014

015

016



(The width is 16mm as shown above)

022



(The width is 16mm as shown above)

011

Note3 : marks shall not be greater than the metric tags, and if you want to print manufacturer marks and customers logo at the same time, The manufacturer logo is given priority to customer logo , as the above shown

Long steel tape



Fibreglass measuring tape